

07/23/99

HEWLETT-PACKARD COMPANY  
Legal Department, 20BN  
P.O. Box 10301  
Palo Alto, California 94303-0890

PATENT APPLICATION

ATTORNEY DOCKET NO. HP 1099 1005-1

IN THE U.S. PATENT AND TRADEMARK OFFICE  
Patent Application Transmittal Letter

ASSISTANT COMMISSIONER FOR PATENTS  
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 CFR 1.53(b) is a(n): (x) Utility ( ) Design

(x) original patent application,  
( ) continuation-in-part application

INVENTOR(S): Amir Doron

TITLE: Digital Still Camera with Still and Motion Image Capabilities

Enclosed are:

(X) The Declaration and Power of Attorney. (x) signed ( ) unsigned or partially signed  
( ) \_\_\_\_\_ sheets of drawings (one set) ( ) Associate Power of Attorney  
( ) Form PTO-1449 (x) Information Disclosure Statement and Form PTO-1449  
( ) Priority document(s) ( ) (Other) \_\_\_\_\_ (fee \$ \_\_\_\_\_)

CLAIMS AS FILED BY OTHER THAN A SMALL ENTITY				
(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) TOTALS
TOTAL CLAIMS	20 — 20	0	X	\$
INDEPENDENT CLAIMS	3 — 3	0	X	\$
ANY MULTIPLE DEPENDENT CLAIMS				\$
BASIC FEE: Design ( ) ; Utility ( 760.00 )				\$ 760.00
TOTAL FILING FEE				\$ 760.00
OTHER FEES				\$
TOTAL CHARGES TO DEPOSIT ACCOUNT				\$ 760.00

Charge \$760.00 to Deposit Account 08-2025. At any time during the pendency of this application, please charge any fees required or credit any over payment to Deposit Account 08-2025 pursuant to 37 CFR 1.25. Additionally please charge any fees to Deposit Account 08-2025 under 37 CFR 1.16, 1.17, 1.19, 1.20 and 1.21. A duplicate copy of this sheet is enclosed.

"Express Mail" label no. EL331325901US

Date of Deposit July 23, 1999

I hereby certify that this is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

By Sherre Anne Treat  
Typed Name: Sherre Anne Treat

Respectfully submitted,

By Michael M. Jester  
Michael M. Jester

Attorney/Agent for Applicant(s)  
Reg. No. 28,022

Date: July 23, 1999

Telephone No.: 619/231-9090

# DIGITAL STILL CAMERA WITH STILL AND MOTION IMAGE CAPABILITIES

## BACKGROUND OF THE INVENTION

5           The present invention relates to electronic still photography, and more particularly, to a digital still camera (DSC) with combined still and motion image capabilities.

10           DSCs are rapidly gaining in popularity with consumers as an alternative to conventional still cameras that use silver halide film. The number of pixels in the color electronic still images has increased to the point where picture detail and clarity are acceptable to consumers. Digital still images can be selected and enhanced before printing with home photo album software, eliminating the cost and expense of purchasing and developing traditional camera film. Advancements in ink jet and laser printer technology, inks and paper allow color prints to be generated from digital still images that rival the quality of silver halide color prints. Digital still  
15 images taken with a DSC can be cut and pasted into various word processing and other publishing applications used on personal computers (PCs). In addition, the digital still images can be used in web pages and can be transmitted over the Internet. From an environmental standpoint, electronic still photography is attractive because it reduces the need for silver halide film manufacture as well as the handling and disposal of chemical developer solutions.

20

          With cameras designed for use by large numbers of consumers moving into the digital domain it is becoming feasible to offer users both still images and moving images of the same scene with the same camera. The hardware and software used by DSCs and video cameras is very similar except in the way the images from the CCD are stored. Figs. 1 and 2 illustrate the

hardware for the image capture and compression of a conventional video camera and a conventional DSC, respectively. The boxes in each of these figures labeled CF denote a compact flash card memory.

5           A conventional NTSC format motion video camera takes around thirty images per second and stores them in a solid state memory before recording the same on tape. Because of the massive amount of data that must be stored in providing video motion images, the data must be compressed. One compression algorithm for motion video that has attained widespread use is the Moving Pictures Expert Group (MPEG) standard for handling video encoding and  
10       decoding. In order to display compressed video information which has been stored it must first be de-compressed to provide decompressed video information. The decompressed video information is then provided in a bit stream to a suitable display. The bit stream of video information is typically stored in a plurality of memory storage locations corresponding to pixel locations on the display screen. The stored video information is generally referred to as a bit  
15       map. The video information required to present a single screen of information on the display is called a frame. The goal of most video systems is to quickly and efficiently decode compressed video information so as to provide realistic motion images.

20           A conventional DSC takes only a single image at a time, usually of a much higher resolution than the images taken by a conventional video camera. The DSC stores the single image in memory using a still image compression algorithm. One compression algorithm for digital still images that has attained widespread use is the Joint Pictures Expert Group (JPEG). In a conventional DSC, once the “shutter” button is depressed, and after a picture has been “taken”, the DSC electronics usually takes several seconds to render the picture internally,

compress it, and then store it in the camera's internal memory. After the compression and storage processes have been completed, the DSC is ready to take another picture. Since most conventional DSCs currently require delays between the taking of successive pictures it is difficult to shoot fast moving objects. Some existing DSCs can take several successive frames at once. They have the capability of taking successive pictures of a moving object and replaying them in sequence, although the motion images are akin to stop motion, i.e. they are jerky and unrealistic, as opposed to video motion images replayed from a de-compressed MPEG format.

If one desires to have a DSC create a motion video segment it is difficult to keep up with the thirty frames per second required to provide motion that is not jerky and unrealistic. A conventional video camera employs significant hardware dedicated to performing fast compression of sequential images. A conventional DSC on the other hand has circuitry designed to perform fast compression of a single high resolution image in order not to introduce an unacceptable delay in the ability to take successive still pictures.

In the past, DSCs have been commercially available that offer a motion capture mode. Typically they implement a parallel architecture that offers two alternative paths through the hardware as shown in Figs. 3 and 4. In each case, the image data is stored in a compact flash card memory, denoted CF. This solution is disadvantageous because of the cost of the additional hardware required.

## SUMMARY OF THE INVENTION

It is therefore the primary object of the present invention to provide a digital still camera (DSC) with combined still and motion image capabilities with a minimum of hardware  
5 complexity.

It is another object of the present invention to provide an inexpensive and efficient method of operating a digital still camera that allows the user to generate still and motion  
10 images.

In accordance with the present invention a camera includes a housing and a lens mounted in the housing for transmitting therethrough light from objects and scenes of interest. An image sensor is mounted in the housing for receiving the light transmitted through the lens and generating output signals representative of an image of an object or a scene of interest. A  
15 manually actuable ON/OFF control is mounted in the housing. A processing circuit is mounted in the housing and is connected to the image sensor for processing the output signals from the image sensor in response to user actuation of the ON/OFF control. A control circuit is mounted in the housing and is connected to the processing circuit. The control circuit selectively generates a first sequence of high resolution still image files or a second sequence of low  
20 resolution still image files and stores the image files in a memory in accordance with a predetermined still image data compression standard. The control circuit selectively executes firmware for retrieving the low resolution image files from the memory, converts the low resolution image files to a motion video sequence in accordance with a predetermined motion image data compression standard, and stores the motion video sequence for later display.

The method of the present invention involves selectively generating a first sequence of high resolution still image files or a second sequence of low resolution still image files and storing the image files in the memory in accordance with a predetermined still image data compression standard. The method further involves selectively retrieving the low resolution  
5 image files from the memory. The method further involves converting the low resolution image files to a motion video sequence in accordance with a predetermined motion image data compression standard, the conversion being performed with firmware, and storing the motion video sequence for later display.

## 10 **BRIEF DESCRIPTION OF THE DRAWINGS**

Fig. 1 is a block diagram illustrating a prior art MPEG hardware implementation for generating motion images.

15 Fig. 2 is a block diagram illustrating a prior art JPEG hardware implementation for generating still images.

Figs. 3 and 4 are block diagrams that together illustrate the dual hardware paths of a prior art camera operable in both motion and still modes.

20 Fig. 5 is a perspective view of a digital camera in accordance with the present invention that has both motion and still mode capabilities.

Fig. 6 is a block diagram of the camera of Fig. 5 illustrating its electronic circuitry.

Fig. 7 is a block diagram illustrating the operation of the dual mode camera of Figs. 5 and 6.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

5

Referring to Figs. 5 and 6, a digital still camera (DSC) 10 constructed in accordance with the present invention is shown in perspective, and block diagram form, respectively. The camera 10 is capable of transferring digital images to a printer 12 (Fig. 6) via cable connection, removable memory or wireless transmission. Referring to Fig. 5, the camera 10 includes a compact, generally rectangular outer plastic camera body or housing 14 that encloses and supports the operative components of the camera in conventional fashion. A lens 16 is mounted in a forward side wall of the housing 14 for transmitting therethrough light from objects and scenes of interest. An eyepiece 17a (Figs. 5 and 6) on the rear side wall of the housing 14 forms part of a view finder that allows the user to view objects and/or scenes of interest through the lens 16 or to view electronically recorded images displayed on a small, internal color liquid crystal display (LCD) 17b (Fig. 6). This is accomplished using a pair of pivoting mirrors (not illustrated) inside of the housing 14.

An image sensor 18 (Fig. 6), preferably in the form of an array of charge coupled devices (CCDs), is mounted in the housing 14 behind the lens 16 for receiving the light transmitted through the lens 16. The image sensor 18 generates analog output signals representative of an image of an object or scene of interest. One of the mirrors inside the housing 14 may be pivoted to selectively send light received through the lens 16 to the eyepiece 17a or the image sensor 18. The other mirror may be pivoted to allow the user to view objects

and scenes through the lens 16 or to view electronic images on the internal LCD 17b as indicated by the dashed line in Fig. 6 .

Referring still to Fig. 6, an array 20 of color filters overlies the forward side of the image sensor 18. The analog signals from the image sensor 18 are serially fed to a gain control circuit 22 the output of which is fed to an analog-to-digital (A/D) converter 24. The digital output of the A/D converter 24 is fed to a digital signal processing (DSP) circuit 26, the output of which is fed through a buffer memory 28 to a control circuit 30. The control circuit 30 receives power from a battery 31 and includes a micro-controller or microprocessor.

Referring still to Fig. 6, light from images and scenes of interest enters the camera 10 through the lens 16 as indicated diagrammatically by the arrows and passes through the color filters 20 before being focused on the active face of the image sensor 18. As is well known in the art, the color filters associated with the various detectors in the CCD array of the image sensor 18 cause the detectors to be sensitive to light of one particular color. By way of example only, the CCD detectors may be configured in a repeating pattern of two by two groups in which the top right detector is sensitive to red light, the top left detector is sensitive to blue light, the bottom right detector is sensitive to green light and the bottom left detector is sensitive to blue light. Each detector of the CCD array accumulates a charge that represents the amount of light in one CCD pixel. A timing generator 36 is coupled between the control circuit 30 and the image sensor 18. The timing generator 36 controls the reading of the array of CCD detectors that make up the image sensor 18 in conventional fashion. The charge accumulated by each CCD detector is serially applied to the input of the gain control circuit 22.



The timing generator 36 (Fig. 6) is capable of periodically flushing the CCD array of the image sensor 18. The gain control circuit 22 implements a conventional correlated double sampling process. This double sampling process accounts for overshoot and undershoot in the outputs of the CCD detectors as the output voltages from each of the detectors in the CCD array are read. The A/D converter 24 converts to digital values the analog voltages read from the CCD detectors after they have been adjusted by the gain control circuit 22.

The DSP 26 (Fig. 6) processes the digital signals from the A/D converter 24 so as to provide a demosaic function, and also performs automatic white balance detection and correction, as well as image sharpening functions in accordance with well known techniques. By way of example, the DSP 26 may be provided in the form of Part No. HD49811TFA commercially available from Hitachi. The output of the DSP 26 is a set of image pixels, each of which represents the color of a particular portion of the image that was captured by the CCD array of the image sensor 18. The entire set of image pixels associated with a complete flushing of the CCD array represents a single image of an object or scene of interest whose "picture" has been "taken" with the camera 10. The single flushing of the CCD array also represents a single frame.

The control circuit 30 (Fig. 6) further includes a hardware JPEG file format conversion component 32. Alternatively, the JPEG file format conversion component 32 could be provided in the form of executable firmware or a combination of hardware and firmware. The JPEG file format conversion component 32 compresses the output received from the DSP 26 through the buffer memory 28 in accordance with the well known JPEG data compression standard. The image information which is in JPEG format is fed to the EXIF file format component 33 which

embeds the JPEG format image information within a file that conforms to the DIGITAL STILL CAMERA FILE FORMAT STANDARD (Version 1.0, July 13, 1995) commonly known as EXIF. The micro-controller of the control circuit 30 may execute firmware to provide the EXIF file format conversion component 33 in lieu of using a dedicated hardware circuit.

5 Alternatively, the EXIF file format conversion component 33 may be a dedicated hardware circuit or a combination of hardware and firmware. The control circuit 30 further includes an MPEG conversion component 34 which is strictly firmware executed by the micro-controller and is not a dedicated circuit.

10 The camera 10 is designed to selectively operate in a motion mode and a still mode. Referring again to Fig. 6, the portions of the camera 10 represented by the elements 22, 24, 26, 28 and 36 process the output signals from the image sensor as pictures are taken in succession to generate sets of pixels representative of a plurality of images of objects or scenes of interest. The control circuit 30 converts these sets of pixels into a plurality of image files representing  
15 images of the objects and scenes of interest. When the camera 10 operates in a still mode, one image file is created for each separate depression and release of the shutter button hereafter described. These sequentially generated image files are in the EXIF file format and represent a sequence of high resolution still pictures taken with the camera 10. These still image files may be temporarily stored in an internal memory 38 and can be conveyed via an output port 40  
20 mounted in the housing 14 of the camera to a cable 42 connected to the printer 12. By way of example, the memory 38 may comprise a non-volatile random access memory ("NVRAM") portion and a volatile RAM portion. Alternatively, it will be understood by those skilled in the art that the cable 42 could be connected to a host in the form of a PC (not illustrated) so that the image files in EXIF format could be further processed in the PC, displayed on its monitor,

or downloaded to a printer connected to the PC. Alternatively, the user of the camera 10 may choose to transmit selected image files to the printer 12 via a removable memory 44.

The memory 44 (Fig. 6) is preferably a flash memory card that plugs into a female  
5 connector 46 in a receptacle or slot 48 formed in an outer surface of the camera housing 14. A floppy diskette or some other form of removable storage media could be used instead of a flash memory card. As another alternative, the user of the camera 10 may choose to transmit selected still image files to a host such as the printer 12 or a PC by utilizing a wireless data link including an infrared (IR) transmitting device 50 (Figs. 5 and 6) mounted in an outer surface  
10 of the camera housing 14. In such a case, the printer 12 receives the IR radiation in which image data has been encoded via an IR receiver 52 (Fig. 6) mounted on the exterior of the printer housing. The printer 12 has conventional circuitry connected to the IR receiver 52 for decoding the image data from the received IR signals. The IR transmitting device 50 is connected to an IR driver circuit 54 which is controlled by control circuit 30 to transmit the desired image data.

When the camera 10 operates in a motion mode, holding down the shutter button will cause a set of low resolution images to be stored in a separate directory in EXIF format in the removable memory 44 (Fig. 6). The number of low resolution images in the directory is selected so that there will be enough frames per second to deliver substantially non-jerky motion, i.e.  
20 approximately thirty frames per second. Stated another way, the sequence of low resolution images is taken at a rate sufficient to ensure realistic real time motion when the motion video sequence is replayed. Since the electronic circuitry of the camera 10 is capable of storing high resolution images, it can also rapidly store a sequence of low resolution images on the removable memory 44 in EXIF file format. Once the shutter button has been released, in order

to rapidly replay the stored low resolution images in a manner that will generate motion images they must first be converted to a suitable motion video format such as MPEG. However, it is no longer necessary for the control circuit 30 to keep up with the thirty frames per second rate in real time since the required frames have all been captured and stored on the removable  
5 memory 44. Therefore, the firmware MPEG conversion component 34 may be utilized. Special micro-code stored in the non-volatile portion of the internal memory 38 is run by the micro-controller of the control circuit 30 to read in the sequence of low resolution EXIF format still image files from the removable memory 44 and to output a single MPEG file comprised of the motion video. The directory of individual low resolution EXIF format still image files is erased  
10 from the removable memory 44 and replaced with the MPEG motion video file. The removable memory can then be loaded into a computer or suitable device for displaying the motion video on a large screen or else the motion video sequence can be played on the camera 10 via its internal LCD 17b. Alternatively, the MPEG motion video file can be transmitted via the wireless transmitter 50 to a host such as a personal computer.

Fig. 7 is a block diagram illustrating the operation of the dual mode camera of Figs. 5 and 6. The present invention provides a DSC that offers a motion capture mode using a hybrid architecture in which the JPEG hardware component 32 effectively replaces the need for MPEG hardware, with the MPEG functions being carried out, in the case of the motion capture  
20 mode, by firmware 34 executed by the micro-controller of the control circuit 30.

Referring still to Fig. 7, in the motion capture mode the CPU takes a succession of digital still pictures using the CCD, RAM buffer and JPEG hardware via pathways A, B and C. These still images are stored in the compact flash card memory via pathways D, E, F and G as

CF1, CF2, CF3 and CF4, respectively. The CPU then utilizes firmware code to convert the JPEG data to an MPEG file which is stored in the compact flash card memory as CF5, replacing CF1, CF2, CF3 and CF4. Those of ordinary skill in the art will be familiar with the firmware code required to convert a series of JPEG files to a single MPEG file. Clearly in an actual  
5 example the MPEG file would be derived from many more JPEG files than four.

The present invention thus provides a DSC with a motion capture mode which does not employ separate JPEG and MPEG hardware circuits. The DSC 10 will not only take conventional high resolution still images, but also can be set to a motion capture mode in which  
10 a succession of low resolution images are rapidly taken and stored in a separate directory in the memory 44. Once the motion capture mode operation is completed, the processor in the camera runs special firmware micro-code that reads in the sequence of low resolution JPEG images and outputs a single file that comprises an MPEG motion video segment. The JPEG still images from which the MPEG file was made are erased so as not to unduly consume the available data  
15 storage space. The MPEG motion video sequence is stored in the memory 44 for later replay.

An informational display 56 (Fig. 1) is mounted in the top side of the camera housing 14 for viewing by the camera user. The display 56 is preferably an LCD that can display alphanumeric and graphical information. The display 56 is driven in conventional fashion by the  
20 LCD driver circuit 58 (Fig. 2) controlled by the control circuit 30. The LCD driver circuit 58 also drives the internal LCD 17b on which recorded images are displayed upon command for viewing through the eyepiece 17a of the camera viewfinder. The display 56 can display a series of menus providing a plurality of command options that can be selected by the user as part of

a graphical user interface (GUI) generated by the control circuit 30 using a control program stored in the internal memory 38.

A plurality of manually actuable controls 62, 64, 66a, 66b, 68, 70a and 70b (Figs. 5 and 6) are mounted in the outer surface of the camera housing 14 so that they can be readily manipulated by the fingers of the user while viewing the informational display 56. By way of example, the manually actuable controls 62, 64, 66a, 66b, 68, 70a and 70b may be of the pushbutton type. The pushbutton 62 it may be depressed to power the camera ON and OFF. The pushbutton 64 may be assigned the shutter button function. When the camera 10 is in its still mode, the pushbutton 64 may be temporarily depressed and released in order take a single still picture. When the camera 10 is in its motion mode, the shutter button 64 may be pushed and held down to take a motion video sequence. The still and motion modes are selected through the GUI. The control circuit 30 generates a sequence of high resolution still image files in response to each momentary actuation of the ON/OFF control 64 and generates a sequence of low resolution still image files in response to the ON/OFF control 64 being actuated and held in an ON condition for a predetermined duration longer than a momentary actuation.

The manually actuable controls 66a and 66b (Fig. 6) may be depressed to scroll up and down through command options displayed on the display 56 to provide the GUI. The pushbutton 68 depressed to select the command option currently highlighted or marked with a cursor. The other push buttons 70a and 70b may be depressed to control other functions such as current strobe mode selection and date/time entry, respectively. The current strobe mode can be selected from a "strobe ON", a "strobe OFF", an "AUTOMATIC" strobe mode, a "RED EYE AUTO" strobe mode and a "RED EYE ON" strobe modes. Each time the pushbutton 70a

is depressed an indication of the current strobe mode can be displayed by the LCD 56. When the desired current strobe mode is displayed, it can be selected and activated in the camera 10, by, for example, depressing the pushbutton 68.

5 When the camera 10 is in its still mode, the user can depress the strobe pushbutton 70a (Figs. 5 and 6) with his or her index finger to set a current strobe mode for the current picture taking session once the DSC 10 has been powered ON. The manually actuable controls on the camera housing 14 could include a dial rotatable (not shown) to select one of several different operating modes of operation by placing a pointer on the dial next to the desired mode. These  
10 different operating modes may include a still mode, a motion video mode, a review/preview mode, a date/time entry mode, and so forth. The dial would be used for mode selection in lieu of, or as an alternative to, mode selection through the GUI via pushbuttons 66a and 66b. The manually actuable controls 62, 64, 66a, 66b, 68, 70a and 70b interface with the control circuit 30 through a switch input/output (I/O) buffering device 71 (Fig. 6) in conventional fashion.

15 A conventional strobe charge/discharge circuit 72 (Fig. 6) is connected between the control circuit 30 and a strobe or flash 74 (Figs. 5 and 6) mounted in a front side of the camera housing 14. The strobe 74 may comprise a gas discharge tube which will flash a bright light on the object or scene of interest when "fired" or energized by the strobe charge/discharge circuit  
20 72 (Fig. 6) in response to a command from the control circuit 30. When the camera 10 is in a still mode, the strobe 74 is fired in accordance with the current strobe mode during a current picture taking session. The strobe charge/discharge circuit 72 receives power from the battery 31. When the DSC 10 is set to an AUTOMATIC strobe mode the ambient luminescence is detected by the control circuit 30 of the DSC 10 each time a picture is taken and the strobe 74

is energized if needed in accordance with pre-programmed luminescence levels. To facilitate this operation, the DSC 10 includes a luminescence detector circuit 76 (Fig. 6) that receives the analog output signal of a suitable luminescence detector 78 (Figs. 5 and 6) mounted in the front side of the camera housing 14.

5

The control circuit 30 also causes a series of menus to be displayed on the informational display 56 providing command options that can be selected upon manual actuation of one of the pushbutton controls. Upon manual actuation of certain ones of the pushbutton controls in the appropriate sequence the control circuit 30 causes individual stored still images to be displayed on the small internal LCD 17b so that they can be viewed via the eyepiece 17a (Figs. 5 and 6) of the viewfinder. Alternatively, the GUI may be used so that the control circuit 30 causes a motion video sequence to be displayed on the LCD 17b. The informational LCD display 56 on top of the camera housing 14 is used solely for displaying alphanumeric data and graphic symbols as part of the GUI.

10  
15

When the camera 10 is in its still mode, the control circuit 30 causes a markup file to be generated in response to the user's selection of a first predetermined sequence of command options via manipulation of the pushbutton controls. The markup file is created using the GUI. The markup file represents the designation of still image files for further processing. The markup file can include information not only about which pictures are being selected, but how many copies are desired. In addition, the markup file can also include information about image enhancements to be performed on the selected images, such as rotation, cropping, brightening, etc.

20



Once the still image markup file has been generated, the user can, by following the appropriate menus on the display 56 and actuating the appropriate pushbutton controls, send the designated still image files to the printer 12 via the cable 42, removable memory 44 or IR transmitter 50. Regardless of the mode of data transfer, the printer 12 receives all of the selected image files designated in the markup file and all of the information about quantity and enhancements. The markup file need only be created once by the user, and the information designated therein can then be used in any of the three modes of data transmission, i.e. via cable 42, removable memory 44 or IR transmitter 50.

As part of the GUI the control circuit 30 also causes a menu of various strobe modes to be displayed on the LCD 56, including a “strobe ON” mode, a “strobe OFF” mode, an “AUTOMATIC” strobe mode, a “RED EYE AUTO” strobe mode and a “RED EYE ON” strobe mode. Any single one of these modes can be selected as the default strobe mode using the GUI, e.g. by scrolling with pushbuttons 66a and 66b and depressing pushbutton 68 when the desired strobe mode is either highlighted or marked with a cursor.

Referring again to Fig. 6, when the DSC 10 is powered ON and is switched to its still mode, the control circuit 30 checks the memory 38 in order to determine which strobe mode to go into. Once the DSC 10 has been powered ON, the user can select the strobe mode in two different ways. First, the user can depress the strobe pushbutton 70a on the top of the camera housing 14. Second, the user can select the strobe mode via the GUI using one or more of the pushbutton controls and following the menus shown on the LCD display 56. Using the strobe pushbutton 70a allows the strobe mode to be changed for the current picture taking session only. Once the DSC 10 is powered OFF, the current selected strobe mode is “forgotten”. Using

the GUI, the user can set a default strobe mode, i.e. from that point forward, the DSC will operate in that strobe mode when in its still mode, and will go into that strobe mode when the DSC is later powered ON in its still mode until the user changes the strobe mode setting via the GUI.

5

While preferred embodiments of my digital still camera and hybrid still/motion image method have been described and illustrated herein, it should be understood by those skilled in the art that my invention may be varied in both arrangement and detail. Therefore, the protection afforded my invention should only be limited in accordance with the following claims.

10

**I CLAIM:**

15

20

## CLAIMS:

1. A camera, comprising:

a housing;

a lens mounted in the housing for transmitting therethrough light from objects and

scenes of interest;

an image sensor mounted in the housing for receiving the light transmitted through the

lens and generating output signals representative of an image of an object or a scene of interest;

a manually actuable ON/OFF control mounted in the housing;

a processing circuit mounted in the housing and connected to the image sensor for processing the output signals from the image sensor in response to user actuation of the

ON/OFF control;

a memory mounted in the housing; and

a control circuit mounted in the housing and connected to the processing circuit including means for selectively generating a first sequence of high resolution still image files or

a second sequence of low resolution still image files and storing the image files in the memory in accordance with a predetermined still image data compression standard, the control circuit

further including firmware means for retrieving the low resolution image files from the memory, converting the low resolution image files to a motion video sequence in accordance with a

predetermined motion image data compression standard, and storing the motion video sequence.

2. A camera according to Claim 1 wherein the predetermined still image data

compression standard is JPEG.

3. A camera according to Claim 1 wherein the predetermined motion image data  
2 compression standard is MPEG.

4. A camera according to Claim 1 wherein the control circuit includes a hardware  
2 JPEG file format conversion component.

5. A camera according to Claim 1 wherein the control circuit includes an EXIF file  
2 format conversion component for embedding JPEG files outputted by the JPEG file format  
conversion component into a plurality of corresponding EXIF files.

6. A camera according to Claim 1 the sequence of low resolution images is taken  
2 at a rate sufficient to ensure substantially non-jerky motion when the motion video sequence  
is replayed.

7. A camera according to Claim 6 wherein the rate is approximately thirty frames  
2 per second.

8. A camera according to Claim 1 wherein the control circuit generates the first  
2 sequence of high resolution still image files in response to each momentary actuation of the  
ON/OFF control and generates the second sequence of low resolution still image files in  
4 response to the ON/OFF control being actuated and held in an ON condition for a  
predetermined duration longer than the momentary actuation.

9. A camera according to Claim 1 wherein the camera further includes a display,  
2 means connected between the display and the control circuit for driving the display, and control  
means for permitting the user to selectively observe on the display selected ones of the high  
4 resolution still images or the motion video sequence.

10. A camera according to Claim 1 and further comprising means for transmitting  
2 the high resolution still image files or the motion video sequence to a host.

11. A method of selectively generating still or motion images with a digital camera,  
2 comprising the steps of:

selectively generating a first sequence of high resolution still image files or a second  
4 sequence of low resolution still image files and storing the image files in the memory in  
accordance with a predetermined still image data compression standard;

6 selectively retrieving the low resolution image files from the memory;

converting the low resolution image files to a motion video sequence in accordance with  
8 a predetermined motion image data compression standard, the conversion being performed with  
firmware; and

10 storing the motion video sequence.

12. The method of Claim 11 wherein the predetermined still image data compression  
2 standard is JPEG and a plurality of JPEG files are generated.

13. The method of Claim 11 wherein the predetermined motion image data  
2 compression standard is MPEG.

2           14.     The method of Claim 11 wherein the still image data compression is performed  
with a hardware JPEG file conversion component.

2           15.     The method of Claim 12 wherein the JPEG files are embedded in a plurality of  
corresponding EXIF files.

2           16.     The method of Claim 11 wherein the sequence of low resolution images is taken  
at a rate sufficient to ensure substantially non-jerky motion when the motion video sequence  
is replayed.

2           17.     The method of Claim 16 wherein the rate is approximately thirty frames per  
second.

2           18.     The method of Claim 11 wherein the first sequence of high resolution still image  
files is generated in response to each momentary actuation of an ON/OFF control and the  
second sequence of low resolution still image files is generated in response to the ON/OFF  
4 control being actuated and held in an ON condition for a predetermined duration longer than  
the momentary actuation.

2           19.     The method of Claim 11 and further comprising the step of selectively displaying  
selected ones of the high resolution still images or the motion video sequence.

20. A digital still camera, comprising:

a housing;

a lens mounted in the housing for transmitting therethrough light from objects and

scenes of interest;

an image sensor mounted in the housing for receiving the light transmitted through the

lens and generating output signals representative of an image of an object or a scene of interest;

a manually actuable ON/OFF control mounted in the housing;

a processing circuit mounted in the housing and connected to the image sensor for processing the output signals from the image sensor in response to user actuation of the

ON/OFF control;

a memory mounted in the housing;

a display mounted in the housing; and

a control circuit mounted in the housing and connected to the processing circuit

including hardware means for selectively generating a first sequence of high resolution still image files or a second sequence of low resolution still image files and storing the image files

in the memory in accordance with a JPEG still image data compression standard to create a plurality of JPEG files, means for embedding JPEG files into a plurality of corresponding EXIF

files, means for storing the EXIF files in a memory, firmware means for retrieving the EXIF files corresponding to the low resolution image files from the memory and for converting the

low resolution image EXIF files to a motion video sequence in accordance with an MPEG motion image data compression standard, means for storing the motion video sequence in the

memory, means connected between the display and the control circuit for driving the display,

and means for causing the control means to selectively display selected ones of the high

resolution still images or the motion video sequence.

## **DIGITAL STILL CAMERA WITH STILL AND MOTION IMAGE CAPABILITIES**

### **ABSTRACT OF THE DISCLOSURE**

A digital still camera (DSC) is provided with both still and motion image modes. In the still mode a plurality of high resolution still image files in JPEG format are embedded in corresponding EXIF files stored in a memory. In the motion mode a sequence of low resolution still image files in JPEG format are embedded in corresponding EXIF files and stored in a special directory in the memory. The low resolution image files are generated at a frame rate that will ensure that non-jerky motion video can later be displayed. In order to avoid unnecessary duplication of hardware, the same JPEG hardware conversion component is used in both the still and motion modes. When the user desires to replay a motion video sequence, a micro-controller in the camera retrieves the low resolution images from the special directory and executes firmware to convert the same into MPEG format to thereby create a motion video sequence that can be displayed on an LCD in the camera. High resolution still images can also be displayed on the same LCD display when the camera is in a still replay mode.



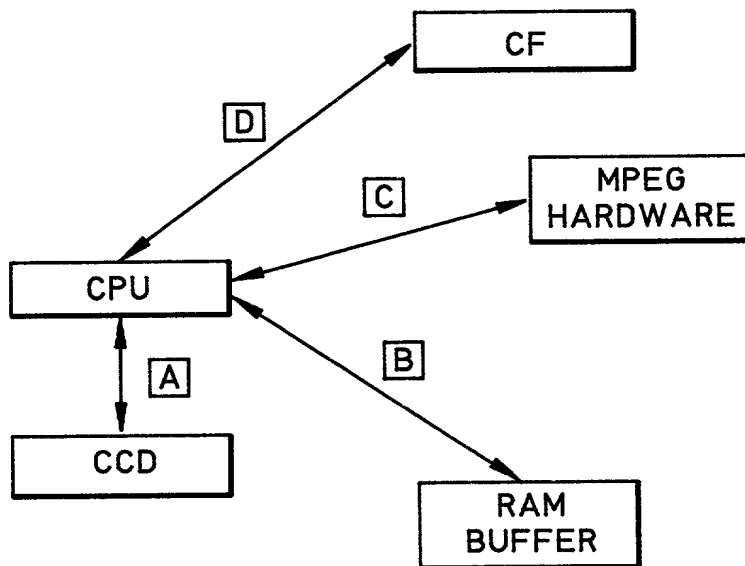


FIG. 1  
PRIOR ART

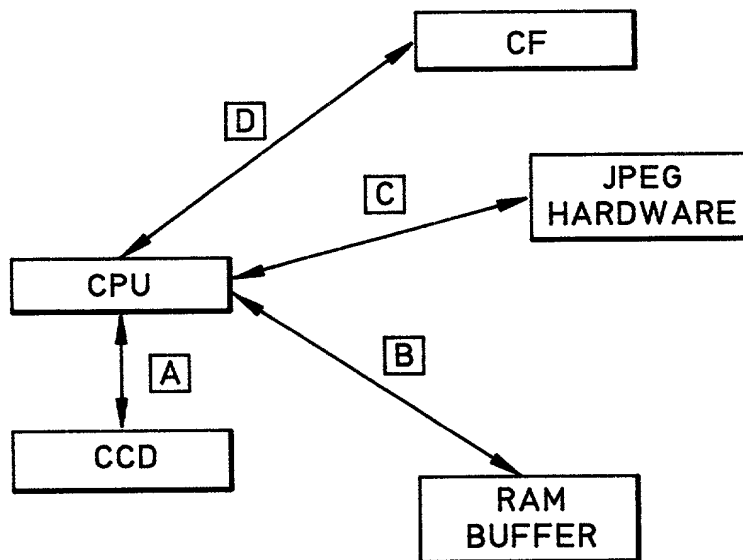


FIG. 2  
PRIOR ART

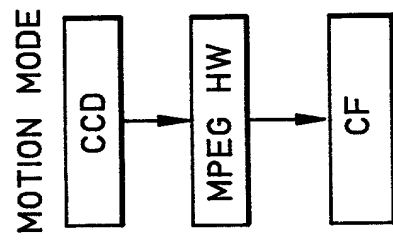


FIG. 3  
PRIOR ART

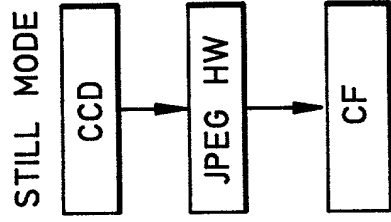


FIG. 4  
PRIOR ART

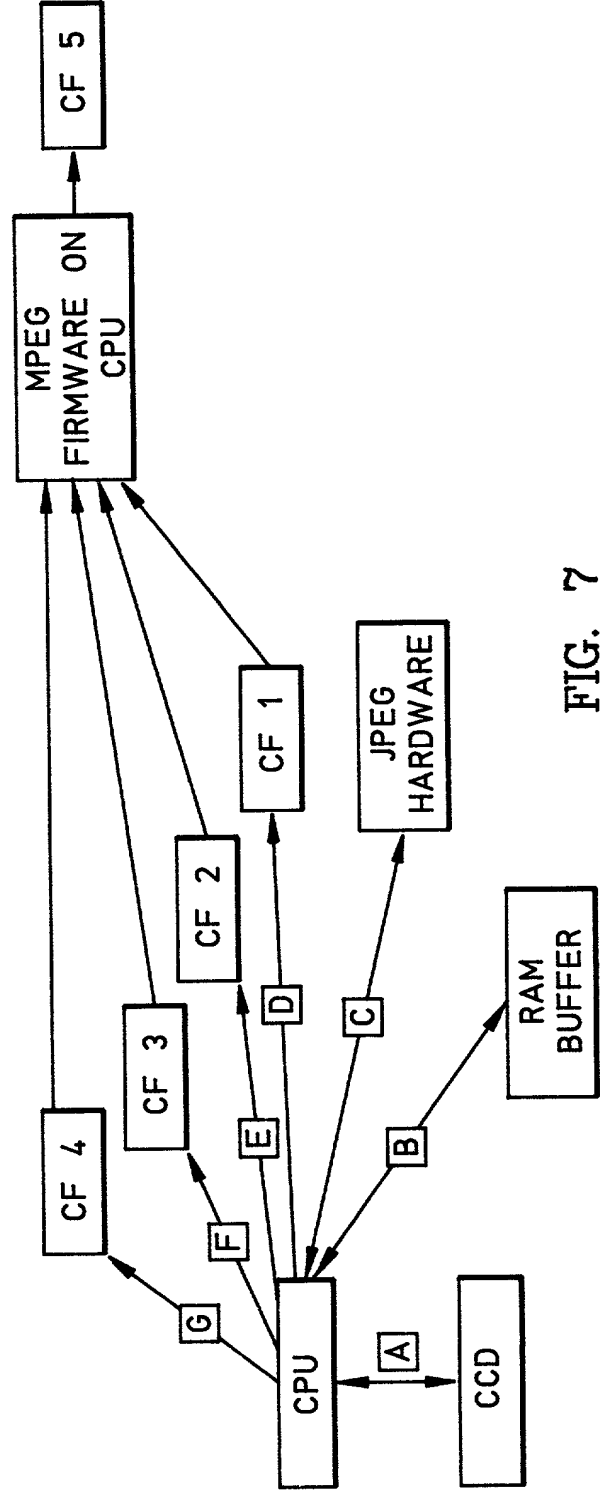


FIG. 7

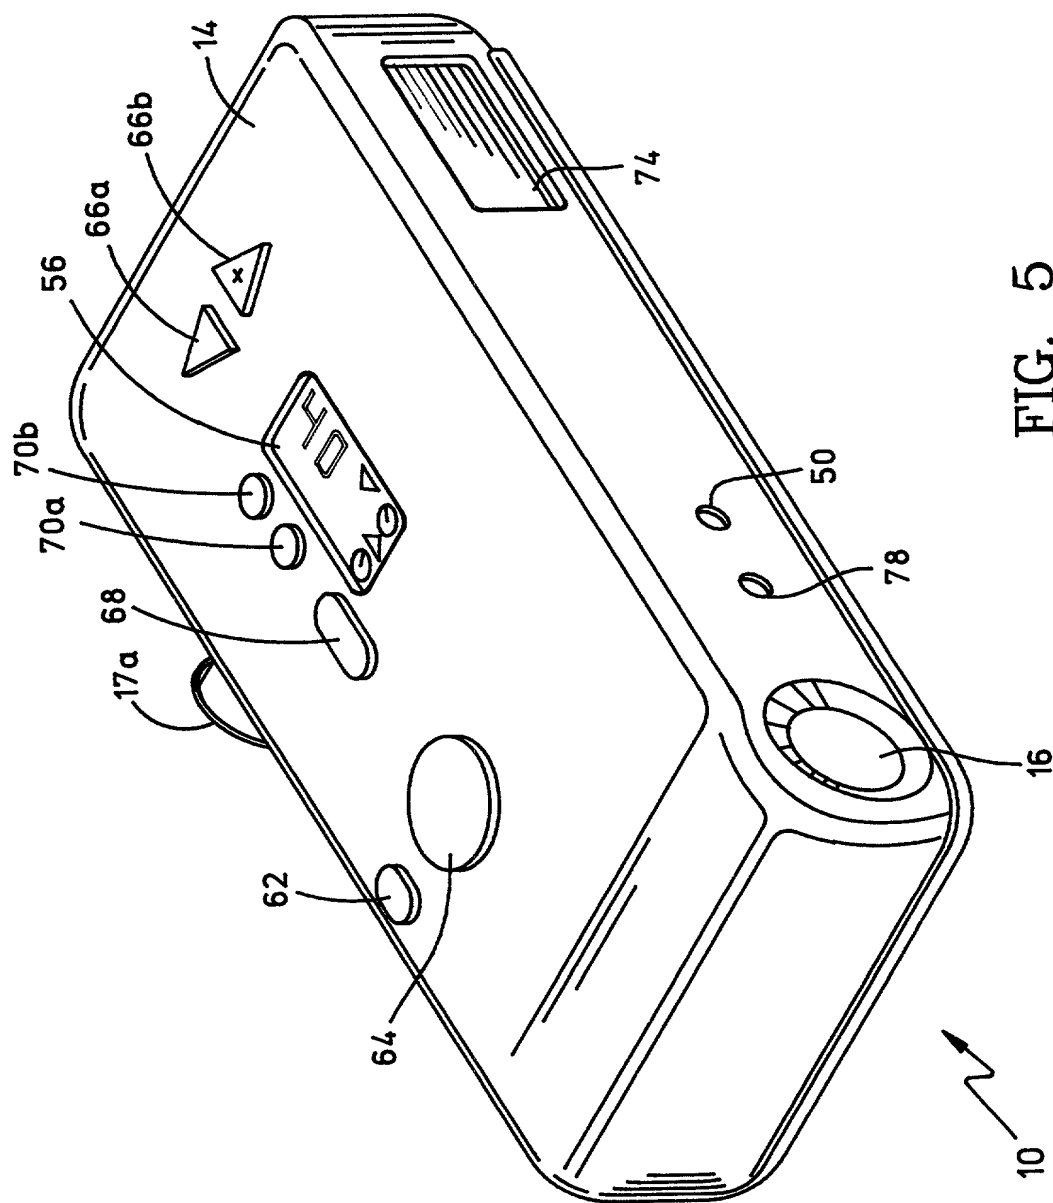


FIG. 5

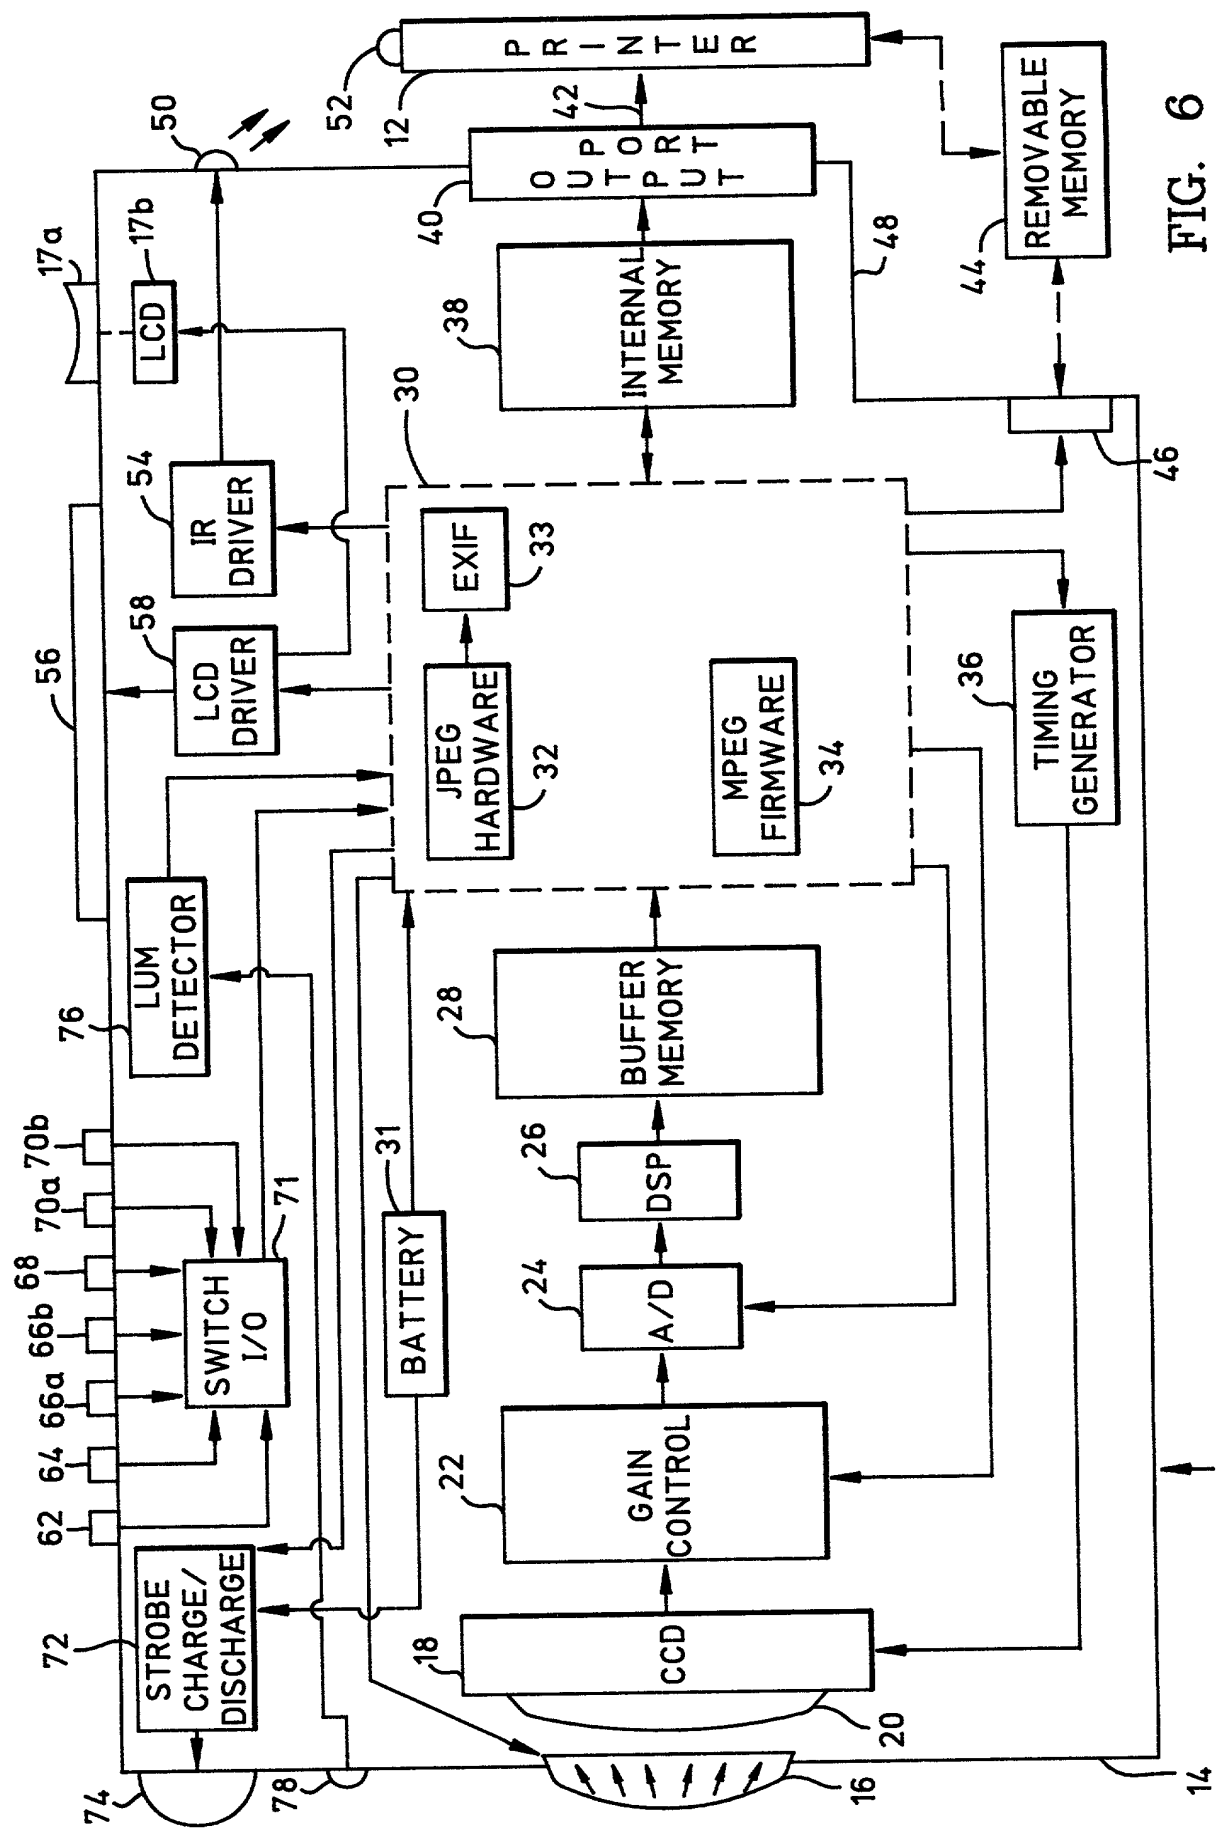


FIG. 6

DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

ATTORNEY DOCKET NO. HP 10991005-1

As a below named inventor, I hereby declare that:

My residence/post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

"Digital Still Camera with Still and Motion Image Capabilities"

the specification of which is attached hereto unless the following box is checked:

( ) was filed on \_\_\_\_\_ as US Application Serial No. or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understood the contents of the above-identified specification, including the claims, as amended by any amendment(s) referred to above. I acknowledge the duty to disclose all information which is material to patentability as defined in 37 CFR 1.56.

**Foreign Application(s) and/or Claim of Foreign Priority**

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor(s) certificate listed below and have also identified below any foreign application for patent or inventor(s) certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NUMBER	DATE FILED	PRIORITY CLAIMED UNDER 35 U.S.C. 119
			YES: _____ NO: _____
			YES: _____ NO: _____

**Provisional Application**

I hereby claim the benefit under Title 35, United States Code Section 119(e) of any United States provisional application(s) listed below:

APPLICATION SERIAL NUMBER	FILING DATE

**U. S. Priority Claim**

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NUMBER	FILING DATE	STATUS (patented/pending/abandoned)

**POWER OF ATTORNEY:**

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) listed below to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Jerry R. Potts	Dennis G. Stenstrom	David S. Romney	Michael H. Jester
Reg. No. 27,091	Reg. No. 28,910	Reg. No. 24,266	Reg. No. 28,022

Send Correspondence to:  
 IP Administration  
 Legal Department, 208N  
 HEWLETT-PACKARD COMPANY  
 P.O. Box 10301  
 Palo Alto, California 94303-0890

Direct Telephone Calls To:

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Inventor: Amir Doron Citizenship: USAResidence: 8455 Lake Ben Avenue, San Diego, CA 92119Post Office Address: SAMEInventor's Signature: Amir DoronDate: 7/22/99